


# Chapter 1 Introduction



## A note on the use of these ppt slides:

We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a lot of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) in substantially unaltered form, that you mention their source (after all, we'd like people to use our book!)
- If you post any slides in substantially unaltered form on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

Thanks and enjoy! JFK/KWR

All material copyright 1996-2009  
J.F Kurose and K.W. Ross, All Rights Reserved

*Computer Networking:  
A Top Down Approach ,  
5<sup>th</sup> edition.  
Jim Kurose, Keith Ross  
Addison-Wesley, April  
2009.*

# Chapter 1: Introduction

## Our goal:

- get "feel" and terminology
- more depth, detail *later* in course
- approach:
  - ❖ use Internet as example

## Overview:

- what's the Internet?
- what's a protocol?
- network edge; hosts, access net, physical media
- network core: packet/circuit switching, Internet structure
- performance: loss, delay, throughput
- security
- protocol layers, service models
- history

# Chapter 1: roadmap

## 1.1 What *is* the Internet?

### 1.2 Network edge

- end systems, access networks, links

### 1.3 Network core

- circuit switching, packet switching, network structure


### 1.4 Delay, loss and throughput in packet-switched networks

### 1.5 Protocol layers, service models

### 1.6 Networks under attack: security

### 1.7 History

# What's the Internet: "nuts and bolts" view

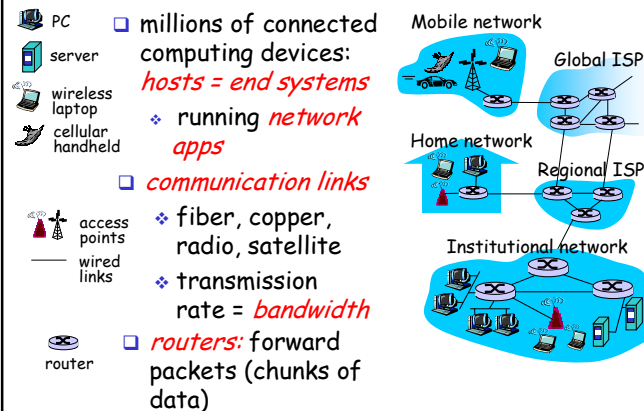


## "Cool" internet appliances



IP picture frame  
<http://www.ceiva.com/>



Web-enabled toaster +  
weather forecaster




World's smallest web server  
<http://www-ccs.cs.umass.edu/~shri/iPic.html>



Internet phones


## What's the Internet: "nuts and bolts" view

- *protocols* control sending, receiving of msgs
  - ❖ e.g., TCP, IP, HTTP, Skype, Ethernet
- *Internet: "network of networks"*
  - ❖ loosely hierarchical
  - ❖ public Internet versus private intranet
- Internet standards
  - ❖ RFC: Request for comments
  - ❖ IETF: Internet Engineering Task Force

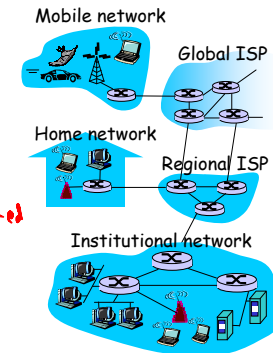

## What's the Internet: a service view

- *communication infrastructure* enables distributed applications:
  - ❖ Web, VoIP, email, games, e-commerce, file sharing
- *communication services provided to apps:*
  - ❖ reliable data delivery from source to destination
  - ❖ "best effort" (unreliable) data delivery



## What's a protocol?

### human protocols:

- "what's the time?"
- "I have a question"
- introductions

... specific msgs sent

... specific actions taken when msgs received, or other events


### network protocols:

- machines rather than humans
- all communication activity in Internet governed by protocols

*protocols define format, order of msgs sent and received among network entities, and actions taken on msg transmission, receipt*

## What's a protocol?

a human protocol and a computer network protocol:

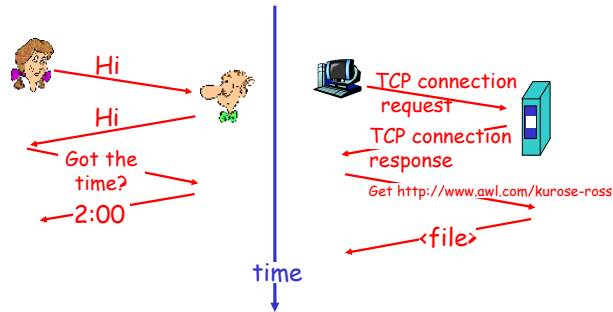

Q: Other human protocols?

## Chapter 1: roadmap

- 1.1 What *is* the Internet?
- 1.2 Network edge
  - end systems, access networks, links
- 1.3 Network core
  - circuit switching, packet switching, network structure
- 1.4 Delay, loss and throughput in packet-switched networks
- 1.5 Protocol layers, service models
- 1.6 Networks under attack: security
- 1.7 History

## Physical Media

- **Bit:** propagates between transmitter/rcvr pairs
- **physical link:** what lies between transmitter & receiver
- **guided media:**
  - ❖ signals propagate in solid media: copper, fiber, coax
- **unguided media:**
  - ❖ signals propagate freely, e.g., radio

### Twisted Pair (TP)

- two insulated copper wires
  - ❖ Category 3: traditional phone wires, 10 Mbps Ethernet
  - ❖ Category 5: 100Mbps Ethernet



## Physical Media: coax, fiber

### Coaxial cable:

- two concentric copper conductors
- bidirectional
- baseband:
  - ❖ single channel on cable
  - ❖ legacy Ethernet
- broadband:
  - ❖ multiple channels on cable
  - ❖ HFC



### Fiber optic cable:

- glass fiber carrying light pulses, each pulse a bit
- high-speed operation:
  - ❖ high-speed point-to-point transmission (e.g., 10's-100's Gps)
- low error rate: repeaters spaced far apart; immune to electromagnetic noise



## Physical media: radio

- signal carried in electromagnetic spectrum
- no physical "wire"
- bidirectional
- propagation environment effects:
  - ❖ reflection
  - ❖ obstruction by objects
  - ❖ interference

### Radio link types:


- **terrestrial microwave**
  - ❖ e.g. up to 45 Mbps channels
- **LAN** (e.g., Wifi)
  - ❖ 11Mbps, 54 Mbps
- **wide-area** (e.g., cellular)
  - ❖ 3G cellular: ~ 1 Mbps
- **satellite**
  - ❖ Kbps to 45Mbps channel (or multiple smaller channels)
  - ❖ 270 msec end-end delay
  - ❖ geosynchronous versus low altitude

## Chapter 1: roadmap

- 1.1 What *is* the Internet?
- 1.2 Network edge
  - end systems, access networks, links
- 1.3 Network core
  - circuit switching, packet switching, network structure
- 1.4 Delay, loss and throughput in packet-switched networks
- 1.5 Protocol layers, service models
- 1.6 Networks under attack: security
- 1.7 History


## The Network Core

- mesh of interconnected routers
- **the fundamental question:** how is data transferred through net?
  - ❖ **circuit switching:** dedicated circuit per call: telephone net
  - ❖ **packet-switching:** data sent thru net in discrete "chunks"



## Network Core: Circuit Switching

- End-end resources reserved for "call"**
- link bandwidth, switch capacity
  - dedicated resources: no sharing
  - circuit-like (guaranteed) performance
  - call setup required



## Network Core: Circuit Switching

network resources  
(e.g., bandwidth)

**divided into "pieces"**


- pieces allocated to calls
- resource piece *idle* if not used by owning call (*no sharing*)

□ dividing link bandwidth into "pieces"


- ❖ frequency division
- ❖ time division

## Circuit Switching: FDM and TDM

FDM *frequency-division multiplexing* Example:  
4 users



TDM *time-division multiplexing*



## Network Core: Packet Switching

each end-end data stream  
**divided into packets**


- user A, B packets *share* network resources
- each packet uses full link bandwidth
- resources used *as needed*

~~Bandwidth division into "pieces"  
Dedicated allocation  
Resource reservation~~

**resource contention:**


- aggregate resource demand can exceed amount available
- congestion: packets queue, wait for link use
- store and forward: packets move one hop at a time
  - ❖ Node receives complete packet before forwarding

## Packet Switching: Statistical Multiplexing

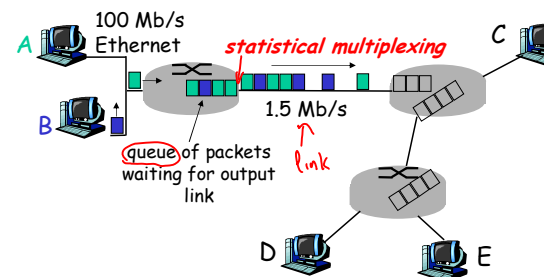

Sequence of A & B packets does not have fixed pattern, bandwidth shared on demand → **statistical multiplexing**.  
TDM: each host gets same slot in revolving TDM frame.

## Packet-switching: store-and-forward




- takes  $L/R$  seconds to transmit (push out) packet of  $L$  bits on to link at  $R$  bps
  - *store and forward*: entire packet must arrive at router before it can be transmitted on next link
  - delay =  $3L/R$  (assuming zero propagation delay)
- Example:**
- $L = 7.5$  Mbits
  - $R = 1.5$  Mbps
  - transmission delay = 15 sec
- } more on delay shortly ...

## Packet switching versus circuit switching

*Packet switching allows more users to use network!*

*— In some circumstances.*

- 1 Mb/s link
- each user:
  - ❖ 100 kb/s when "active"
  - ❖ active 10% of time

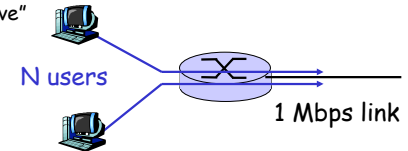

- *circuit-switching*:
  - ❖ 10 users
- *packet switching*:
  - ❖ with 35 users, probability > 10 active at same time is less than .0004

Q: how did we get value 0.0004?

## Packet switching versus circuit switching

*Is packet switching a "slam dunk winner?"*

- great for bursty data
  - ❖ resource sharing
  - ❖ simpler, no call setup
- *excessive congestion*: packet delay and loss
  - ❖ protocols needed for reliable data transfer, congestion control
- *Q: How to provide circuit-like behavior?*
  - ❖ bandwidth guarantees needed for audio/video apps
  - ❖ still an unsolved problem (chapter 7)

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet-switching)?


## Chapter 1: roadmap

- 1.1 What *is* the Internet?
- 1.2 Network edge
  - end systems, access networks, links
- 1.3 Network core
  - circuit switching, packet switching, network structure
- 1.4 *Delay, loss and throughput in packet-switched networks*
- 1.5 Protocol layers, service models
- 1.6 Networks under attack: security
- 1.7 History

## How do loss and delay occur?

packets *queue* in router buffers


- ❑ packet arrival rate to link exceeds output link capacity
- ❑ packets queue, wait for turn

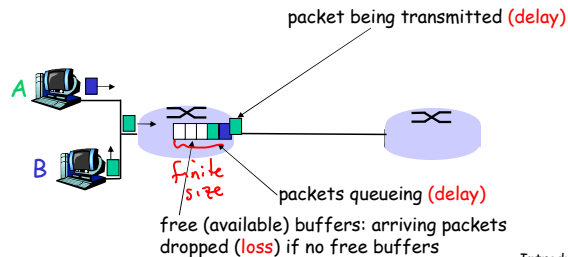

Introduction 1-25

## Four sources of packet delay

- ❑ 1. nodal processing:
  - ❖ check bit errors
  - ❖ determine output link
- ❑ 2. queueing
  - ❖ time waiting at output link for transmission
  - ❖ depends on congestion level of router

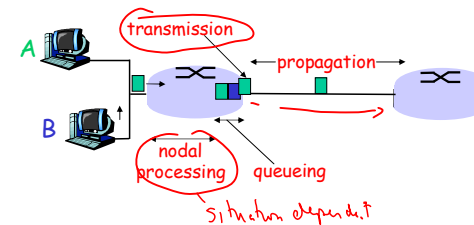


Introduction 1-26

## Delay in packet-switched networks

- 3. Transmission delay:  $\frac{L}{R}$ 
  - ❑ R = link bandwidth (bps)
  - ❑ L = packet length (bits)
  - ❑ time to send bits into link =  $L/R$
- 4. Propagation delay:
  - ❑ d = length of physical link
  - ❑ s = propagation speed in medium ( $\sim 2 \times 10^8$  m/sec)
  - ❑ propagation delay =  $d/s$

Note: s and R are very different quantities!

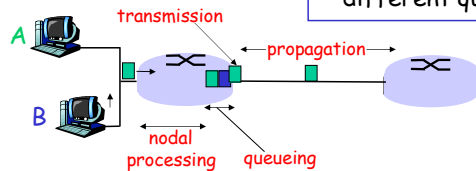

Introduction 1-27

## Magnitudes and Units: Very Important!

- ❑ Prefixes: nano, micro, milli, kilo, mega, giga,  $10^9$  tera - seconds, bits, bytes
 

$10^{-9}$	$10^{-6}$	$10^{-3}$	1	$10^3$	$10^6$	$10^9$
				meters	octet	
- ❑ For our purposes a byte is usually 8 bits - rounding off to 10 is a good approximation
- ❑ Don't confuse things with different units:
  - ❖ Packet length (L) - bits, bytes
  - ❖ Transmission Rate (R) - bits/sec, bytes/sec
  - ❖ Delay (d) - seconds
  - ❖ Propagation speed (s) - meters/sec
- ❑ Speed of light  $2e8$  m/sec,  $2e5$  km/sec in wire or fiber;  $3e8$  m/sec in free space

## Example calculations

- How long does it take to send 1 Mbyte packet at a rate of 50kbits/sec (transmission delay)


$$\frac{8 \times 10^6}{50 \times 10^3} = \frac{8}{50} \times 10^3 \text{ seconds} = .16 \times 10^3 = 160 \text{ sec}$$

- What is the round trip delay for a bit sent from the earth to a synchronous orbit satellite at 40,000 km above the earth (propagation delay)

$$\frac{40,000 \text{ km}}{3 \times 10^8 \text{ km/sec}} = .133 \text{ sec}$$


- In such calculations make sure you get the units right!

## Putting it together: Caravan analogy



- cars "propagate" at 100 km/hr
- toll booth takes 12 sec to service car (transmission time)
- car~bit; caravan ~ packet
- Q: How long until caravan is lined up before 2nd toll booth?
- A: 62 minutes
- Time to "push" entire caravan through toll booth onto highway =  $12 \times 10 = 120 \text{ sec}$
- Time for last car to propagate from 1st to 2nd toll booth:  $100 \text{ km} / (100 \text{ km/hr}) = 1 \text{ hr}$

## Caravan analogy (more)



- Cars now "propagate" at 1000 km/hr
- Toll booth now takes 1 min to service a car
- Q: Will cars arrive to 2nd booth before all cars serviced at 1st booth?
- Yes! After 7 min, 1st car at 2nd booth and 3 cars still at 1st booth.
- 1st bit of packet can arrive at 2nd router before packet is fully transmitted at 1st router!
- See Ethernet applet at AWL Web site